

# VERIFICATION CERTIFICATE



**NOT TRANSFERABLE**

This Verification Certificate is hereby issued to the named GRANTEE and is VALID ONLY for the equipment identified hereon for use under the rules and regulations listed below:

**GRANTEE:**

Address: Sangoma Technologies Corp.  
50 McIntosh Drive, Suite 120  
Markham, Ontario  
Canada, L3R 9T3  
Contact Person: Mr. Michael Feldman  
Phone #: 905-474-1990 ext. 117  
Fax #: 905-474-9223  
Email Address: m.feldman@sangoma.com

**Equipment Type:**

**Product Name:**

**Model No.:**

**Year of manufacture:**

Unintentional Radiators for Use in Non-Residential Areas  
S5142A / AFT Series  
S5142A / A101+A103  
2003

**The above product was  
tested by UltraTech  
Engineering Labs Inc. and  
found to comply with:**

FCC Part 15, Subpart B - Class A Unintentional Radiators for Use in  
Commercial and Industrial Areas.

- **Note(s):** See attached report, UltraTech's File No.: SNG019-FCC15A, dated January 28, 2004 for details and conditions of Verification Compliance.



Approved by: Tri M. Luu, P.Eng.  
V.P. – Engineering

## UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4  
Tel.: (905) 829-1570 Fax.: (905) 829-8050

Website: [www.ultratech-labs.com](http://www.ultratech-labs.com) Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Email: [tri@ultratech-labs.com](mailto:tri@ultratech-labs.com)



31040/SIT



C-1376



46390-2049



200093-0



SL2-IN-E-1119R



00-034



# ENGINEERING TEST REPORT



**S5142A / AFT Series**  
**Model No.: S5142A / A101+A103**

*Applicant:* **Sangoma Technologies Corp.**  
50 McIntosh Drive, Suite 120  
Markham, Ontario  
Canada, L3R 9T3

**Tested in Accordance With**

**Federal Communications Commission (FCC)**  
**CFR 47, Part 15, Subpart B**  
**Class A Unintentional Radiators**

**UltraTech's File No.: SNG019-FCC15A**

This Test report is Issued under the Authority of  
Tri M. Luu, Professional Engineer,  
Vice President of Engineering  
UltraTech Group of Labs

Date: January 28, 2004



Report Prepared by: Chau Le

Tested by: Phuong Ngo, EMC Technician


Issued Date: January 28, 2004

Test Dates: December 17 & 18, 2003

- The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.
- This report must not be used by the client to claim product endorsement by NVLAP or any agency of the US Government.

## UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4  
Tel.: (905) 829-1570 Fax.: (905) 829-8050  
Website: [www.ultratech-labs.com](http://www.ultratech-labs.com) Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Email: [tri@ultratech-labs.com](mailto:tri@ultratech-labs.com)



31040/SIT

C-1376

46390-2049

200093-0

SL2-IN-E-1119R

00-034

## TABLE OF CONTENTS

<b>EXHIBIT 1. INTRODUCTION .....</b>	<b>4</b>
1.1. SCOPE.....	4
1.2. RELATED SUBMITTAL(S)/GRANT(S).....	4
1.3. NORMATIVE REFERENCES .....	4
<b>EXHIBIT 2. PERFORMANCE ASSESSMENT.....</b>	<b>5</b>
2.1. CLIENT INFORMATION .....	5
2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION.....	5
2.3. LIST OF COMPONENTS/PARTS OF THE EUT .....	6
2.4. LIST OF EUT'S PORTS .....	6
2.5. ANCILLARY EQUIPMENT .....	7
<b>EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS .....</b>	<b>8</b>
3.1. CLIMATE TEST CONDITIONS .....	8
3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS.....	8
3.3. BLOCK DIAGRAM OF TEST SETUP .....	9
<b>EXHIBIT 4. SUMMARY OF TEST RESULTS .....</b>	<b>10</b>
4.1. LOCATION OF TESTS .....	10
4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS .....	10
4.3. MODIFICATIONS REQUIRED FOR COMPLIANCE .....	10
4.4. DEVIATION OF THE STANDARD TEST PROCEDURES .....	10
<b>EXHIBIT 5. MEASUREMENTS, EXAMINATIONS &amp; TEST DATA FOR EMC EMISSIONS .....</b>	<b>11</b>
5.1. TEST PROCEDURES.....	11
5.2. MEASUREMENT UNCERTAINTIES .....	11
5.3. MEASUREMENT EQUIPMENT USED: .....	11
5.4. AC POWERLINE CONDUCTED EMISSIONS @ FCC PART 15, SUBPART B, PARA.15.107(B).....	12
5.4.1. Limits .....	12
5.4.2. Method of Measurements.....	12
5.4.3. Test Equipment List .....	12
5.4.4. Test Data .....	13
5.4.5. Photographs of Test Setup.....	16
5.5. RADIATED EMISSIONS FROM CLASS A UNINTENTIONAL RADIATORS (DIGITAL DEVICES) @ FCC 15.109(B) .	18
5.5.1. Limits .....	18
5.5.2. Method of Measurements.....	18
5.5.3. Test Equipment List .....	18
5.5.4. Test Data .....	19
5.5.5. Plots.....	22
5.5.6. Photographs of Test Setup.....	23
<b>EXHIBIT 6. MEASUREMENT UNCERTAINTY.....</b>	<b>25</b>
6.1. LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY .....	25
6.2. RADIATED EMISSION MEASUREMENT UNCERTAINTY .....	26
<b>EXHIBIT 7. MEASUREMENT METHODS .....</b>	<b>27</b>
7.1. GENERAL TEST CONDITIONS.....	27
7.1.1. Test Conditions.....	27
7.1.2. Method of Measurements - AC Mains Conducted Emissions .....	27
7.1.3. Method of Measurements - Electric Field Radiated Disturbance .....	31

<b>EXHIBIT 8.</b>	<b>LABELLING &amp; VERIFICATION REQUIREMENTS .....</b>	<b>35</b>
8.1.	SECTION 15.19 - LABELING REQUIREMENTS .....	35
8.2.	SECTIONS 15.21 & 15.105 - INFORMATION TO USER .....	35
8.3.	SECTION 2.909 - RESPONSIBLE PARTY .....	36
8.4.	SECTION 2.945 - SAMPLING TEST OF EQUIPMENT COMPLIANCE.....	36
8.5.	SECTION 2.946 - PENALTY FOR FAILURE TO PROVIDE TEST SAMPLES AND DATA. ....	36
8.6.	LIMITATION ON VERIFICATION: FCC PART 2, SUBPART J, SECTION 2.952 .....	36
8.7.	RESPONSIBILITY OF MANUFACTURER OR IMPORTER: FCC PART 2, SUBPART J, SECTION 2.953 ...	37
8.8.	IDENTIFICATION: FCC PART 2, SUBPART J, SECTION 2.954.....	37
8.9.	RETENTION OF RECORDS: FCC PART 2, SUBPART J, SECTION 2.955 .....	37
8.10.	FCC INSPECTION & SUBMISSION OF EQUIPMENT FOR TESTING: FCC PART 2, SUBPART J, SEC. 2.956	38
8.11.	SAMPLING TESTS OF EQUIPMENT COMPLIANCE: FCC PART 2, SUBPART J, SECTION 2.957.....	38



## EXHIBIT 1. INTRODUCTION

### 1.1. SCOPE

Reference:	FCC Part 15, Subpart B, Sections 15.107 & 15.109
Title	Telecommunication - Code of Federal Regulations, CFR 47, Part 15
Purpose of Test:	To gain FCC Verification Authorization for a Class A Unintentional Radiator.
Test Procedures	Both conducted and radiated emissions measurements were conducted in accordance with American National Standards Institute ANSI C63.4 - American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
Environmental Classification:	Residential, Light-industry, Commercial & Industry

### 1.2. RELATED SUBMITTAL(S)/GRANT(S)

None

### 1.3. NORMATIVE REFERENCES

Publication	YEAR	Title
FCC CFR Parts 0-15	2002	Code of Federal Regulations – Telecommunication
ANSI C63.4	1992	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
CISPR 22 & EN 55022	1997 1998	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
CISPR 16-1		Specification for Radio Disturbance and Immunity measuring apparatus and methods

## EXHIBIT 2. PERFORMANCE ASSESSMENT

### 2.1. CLIENT INFORMATION

<b>APPLICANT:</b>	
<b>Name:</b>	Sangoma Technologies Corp.
<b>Address:</b>	50 McIntosh Drive, Suite 120 Markham, Ontario Canada, L3R 9T3
<b>Contact Person:</b>	Mr. Michael Feldman Phone #: 905-474-1990 ext. 117 Fax #: 905-474-9223 Email Address: m.feldman@sangoma.com

<b>MANUFACTURER:</b>	
<b>Name:</b>	Sangoma Technologies Inc.
<b>Address:</b>	50 McIntoch Drive, Suite 120 Markham, Ontario Canada, L3R 9T3
<b>Contact Person:</b>	Mr. Michael Feldman Phone #: 905-474-1990 ext. 117 Fax #: 905-474-9223 Email Address: m.feldman@sangoma.com

### 2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

<b>Brand Name</b>	Sangoma Technologies Corp.
<b>Product Name</b>	S5142A / AFT Series
<b>Model Name or Number</b>	S5142A / A101+A103
<b>Serial Number</b>	SN - 00015 / SN - 0004
<b>Part Number</b>	S5142A / A101
<b>Type of Equipment</b>	Unintentional Radiators
<b>Oscillators' Frequencies</b>	33 MHz / 2.048 MHz, 12.352 MHz
<b>CPUs' Frequencies</b>	33 MHz / no CPU
<b>Power input source:</b>	PCI interface / PCI interface

## 2.3. LIST OF COMPONENTS/PARTS OF THE EUT

Please refer the part list provided by manufacturer.

## 2.4. LIST OF EUT'S PORTS

Port Number	EUT's Port Description	Number of Identical Ports	Connector Type	Cable Type (Shielded/Non-shielded)
1	<b>For A101A</b>			
2	T1/E1 interface	2 ports	RJ-48	Non-shielded
3	For S5142A			
4	RS232/V35A	1 port	HDB78	Shielded

### NOTES:

- (1) **Ports of the EUT which in normal operation** were connected to ancillary equipment through interconnecting cables via a representative interconnecting cable to simulate the input/output characteristics.
- (2) **Ports which are not connected to cables during normal intended operation** (for factory/technical services uses only) : None

## 2.5. ANCILLARY EQUIPMENT

The EUT was tested while connected to the following representative configuration of ancillary equipment necessary to exercise the ports during tests:

<b>Ancillary Equipment # 1</b>	
Brand name:	HP Pavilion 700 SYS: P9853A
Serial Number:	MX24818639
Cable Type:	Shielded
Connected to EUT's Port:	Card edge connector

<b>Ancillary Equipment # 2</b>	
Brand name:	IBM Monitor
Model Name or Number:	6547-OAN
Serial Number:	23-CCV98
Cable Type:	Shielded
Connected to EUT's Port:	VGA port (HD15)

<b>Ancillary Equipment # 3</b>	
Brand name:	Printer Hewlett Packard
Model Name or Number:	C4549A
Serial Number:	US6331G23P
Cable Type:	Shielded
Connected to EUT's Port:	Parallel port (DB25)

<b>Ancillary Equipment # 4</b>	
Brand name:	Compaq Mouse
Part Number:	334684-006
Cable Type:	Shielded
Connected to EUT's Port:	Mouse port

<b>Ancillary Equipment # 5</b>	
Brand name:	IBM Keyboard
Model Name or Number:	KB-9910
Serial Number:	0004884
Cable Type:	Shielded
Connected to EUT's Port:	Keyboard port

<b>Ancillary Equipment # 6</b>	
Brand name:	Koss Speakers
Cable Type:	Non-shielded
Connected to EUT's Port:	Phono

## EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

### 3.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:


Temperature:	22°C
Humidity:	13%
Pressure:	102 kPa
Power input source:	PCI interface / PCI interface

### 3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS

A101 board and S5142A board are continuously running in the loop back mode.

### 3.3. BLOCK DIAGRAM OF TEST SETUP

The following drawings show details of the test setup for radiated emissions measurements

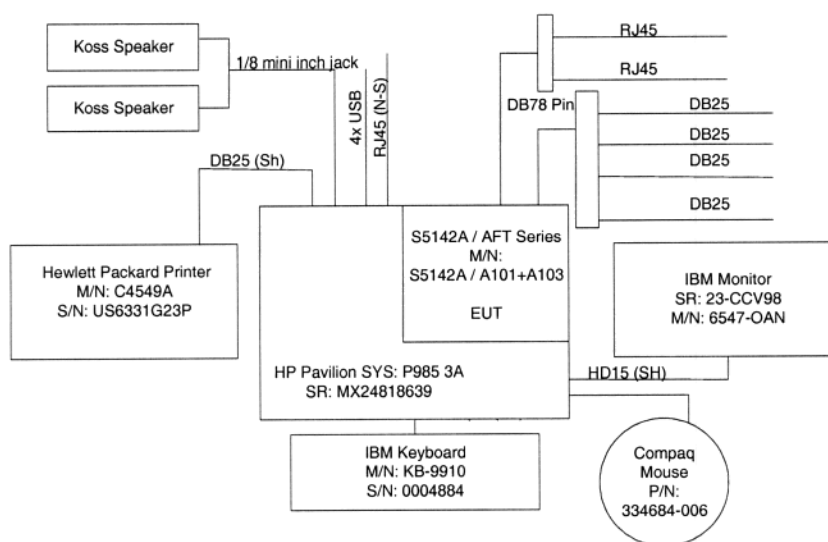

## EXHIBIT 4. SUMMARY OF TEST RESULTS

### 4.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

- AC Powerline Conducted Emissions were performed in UltraTech's shielded room, 16'(L) by 12'(W) by 12'(H).
- Radiated Emissions were performed at the Ultratech's 10 Meter Open Field Test Site (OFTS) situated in the Town of Oakville, Province of Ontario.

The above sites have been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville Open Field Test Site has been filed with FCC office (FCC File No.: 31040/SIT 1300B3) and Industry Canada office (Industry Canada File No.: IC2049). Last Date of Site Calibration: Nov. 04, 2003.

### 4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS

FCC PART 15, SUBPART B	TEST REQUIREMENTS	MARGIN BELOW (-) / ABOVE (+) THE LIMITS	COMPLIANCE (YES/NO)
15.107(b), Class A	AC Power Line Conducted Emissions Measurements	- 20.1 dB @ 0.20 MHz	Yes
15.109(b), Class A	Radiated Emissions from Computing Devices (Digital Devices)	- 1.1 dB @ 61.15 MHz	Yes

### 4.3. MODIFICATIONS REQUIRED FOR COMPLIANCE

- 1)- 8x Ferrite Steward P/N 2702029-0A0 clamped on short cables. Loop 1 turns (2x Ferrite for each one.)
- 2)- 2x Ferrite Steward P/N 28A5776-0A0 clamped on long cables loop 1 ½ turns.

### 4.4. DEVIATION OF THE STANDARD TEST PROCEDURES

None

## **EXHIBIT 5. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS**

### **5.1. TEST PROCEDURES**

This section contains test results only. Details of test methods and procedures can be found in Exhibit 7 of this report

### **5.2. MEASUREMENT UNCERTAINTIES**

The measurement uncertainties stated were calculated in accordance with requirements of UKAS Document NIS 81 with a confidence level of 95%. Please refer to Exhibit 6 for Measurement Uncertainties.

### **5.3. MEASUREMENT EQUIPMENT USED:**

The measurement equipment used complied with the requirements of the Standards referenced in the Methods & Procedures ANSI C63.4:1992, CISPR 22 and CISPR 16-1.



## 5.4. AC POWERLINE CONDUCTED EMISSIONS @ FCC PART 15, SUBPART B, PARA.15.107(B)

### 5.4.1. Limits

The equipment shall meet the limits of the following table:

Test Frequency Range (MHz)	CLASS A LIMITS		Measuring Bandwidth
	Quasi-Peak (dB $\mu$ V)	Average* (dB $\mu$ V)	
0.15 to 0.5	79	66	RBW = 9 kHz VBW $\geq$ 9 kHz for QP VBW = 1 Hz for Average
0.5 to 30	73	60	RBW = 9 kHz VBW $\geq$ 9 kHz for QP VBW = 1 Hz for Average

### 5.4.2. Method of Measurements

Refer to Exhibit 7 of this test report & ANSI C63-4:1992

### 5.4.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Hewlett Packard	HP 8593EM	3412A00103	9 kHz – 26.5 GHz
Transient Limiter	Hewlett Packard	11947A	310701998	9 kHz – 200 MHz 10 dB attenuation
L.I.S.N.	EMCO	3825/2	89071531	9 kHz – 200 MHz 50 Ohms / 50 $\mu$ H
12'x16'x12' RF Shielded Chamber	RF Shielding	...	...	...

**5.4.4. Test Data**

The emissions were scanned from 150 kHz to 30 MHz at AC mains Terminal via a LISN, and all emissions less than 50 dB below the limits were recorded.							
FREQUENCY (MHz)	RF LEVEL (dBuV)	RECEIVER DETECTOR (P/QP/AVG)	QP LIMIT (dBuV)	AVG LIMIT (dBuV)	MARGIN (dB)	PASS/ FAIL	LINE TESTED (L1/L2)
0.21	36.9	QP	79.0	66.0	-42.1	PASS	L1
0.21	27.2	AVG	79.0	66.0	-38.8	PASS	L1
2.47	35.4	QP	73.0	60.0	-37.6	PASS	L1
2.47	30.5	AVG	73.0	60.0	-29.5	PASS	L1
21.26	36.8	QP	73.0	60.0	-36.2	PASS	L1
21.26	28.1	AVG	73.0	60.0	-31.9	PASS	L1
0.20	47.5	QP	79.0	66.0	-31.5	PASS	L2
0.20	45.9	AVG	79.0	66.0	-20.1	PASS	L2
0.31	38.2	QP	79.0	66.0	-40.8	PASS	L2
0.31	37.3	AVG	79.0	66.0	-28.7	PASS	L2
21.45	36.3	QP	73.0	60.0	-36.7	PASS	L2
21.45	28.2	AVG	73.0	60.0	-31.8	PASS	L2

The following plots graphically represent the test results recorded in the above Test Data Table.


UltraTech Group of Labs	
Applicant:	Sangoma Technologies Inc.
Product:	S5142A / AFT Series
Model:	S5142A / A101+A103

AC POWER LINE CONDUCTED EMISSIONS MEASUREMENT PLOT			
Detector: <input checked="" type="checkbox"/> PEAK <input checked="" type="checkbox"/> QUASI-PEAK <input type="checkbox"/> AVERAGE			Temp: 22°C Humidity: 13%
Line Tested: 1	Line Voltage: 120Vac	Test Tech: Quan Ngo	Test Date: Dec. 17/03
Standard: FCC15A			

47

Signal	Freq (MHz)	PK Amp	QP Amp	AV Amp	QP $\Delta$ L 1
1	0.205540	40.5	36.9	27.2	-42.1
2	2.467195	39.8	35.4	30.5	-37.6
3	21.260845	38.7	36.8	28.1	-36.2

ACTV DET: PEAK  
 MEAS DET: PEAK QP AVG  
 MKR 21.30 MHz  
 38.23 dB $\mu$ V

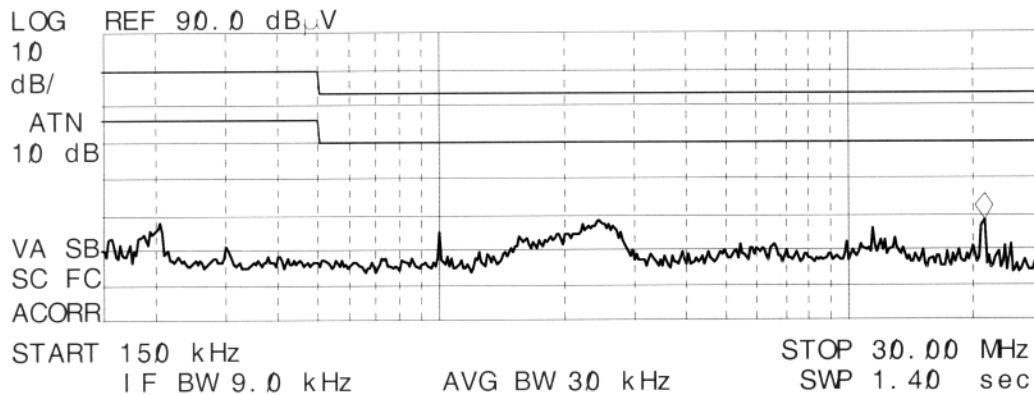


UltraTech Group of Labs	
Applicant:	Sangoma Technologies Inc.
Product:	S5142A / AFT Series
Model:	S5142A / A101+A103

AC POWER LINE CONDUCTED EMISSIONS MEASUREMENT PLOT			
Detector: <input checked="" type="checkbox"/> PEAK <input checked="" type="checkbox"/> QUASI-PEAK <input type="checkbox"/> AVERAGE			Temp: 22°C Humidity: 13%
Line Tested: 2	Line Voltage: 120Vac	Test Tech: Quan Ngo	Test Date: Dec. 17/03
Standard: FCC15A			

hp


Signal	Freq (MHz)	PK Amp	QP Amp	AV Amp	QP $\Delta$ L1
1	0.204100	49.4	47.5	45.9	-31.5
2	0.307365	39.8	38.2	37.3	-40.8
3	21.451535	39.6	36.3	28.2	-36.7


ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 200 kHz  
46.65 dB $\mu$ V

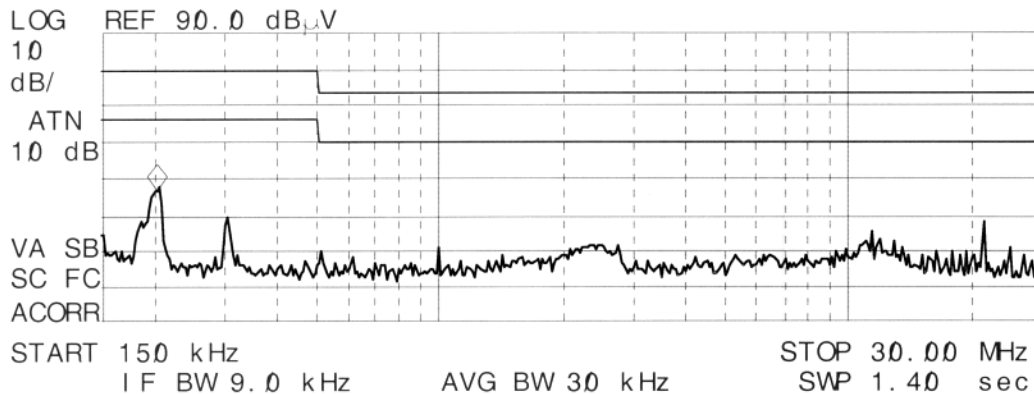

#### 5.4.5. *Photographs of Test Setup*

Refer to the following photographs for setup and arrangement of equipment under tests.

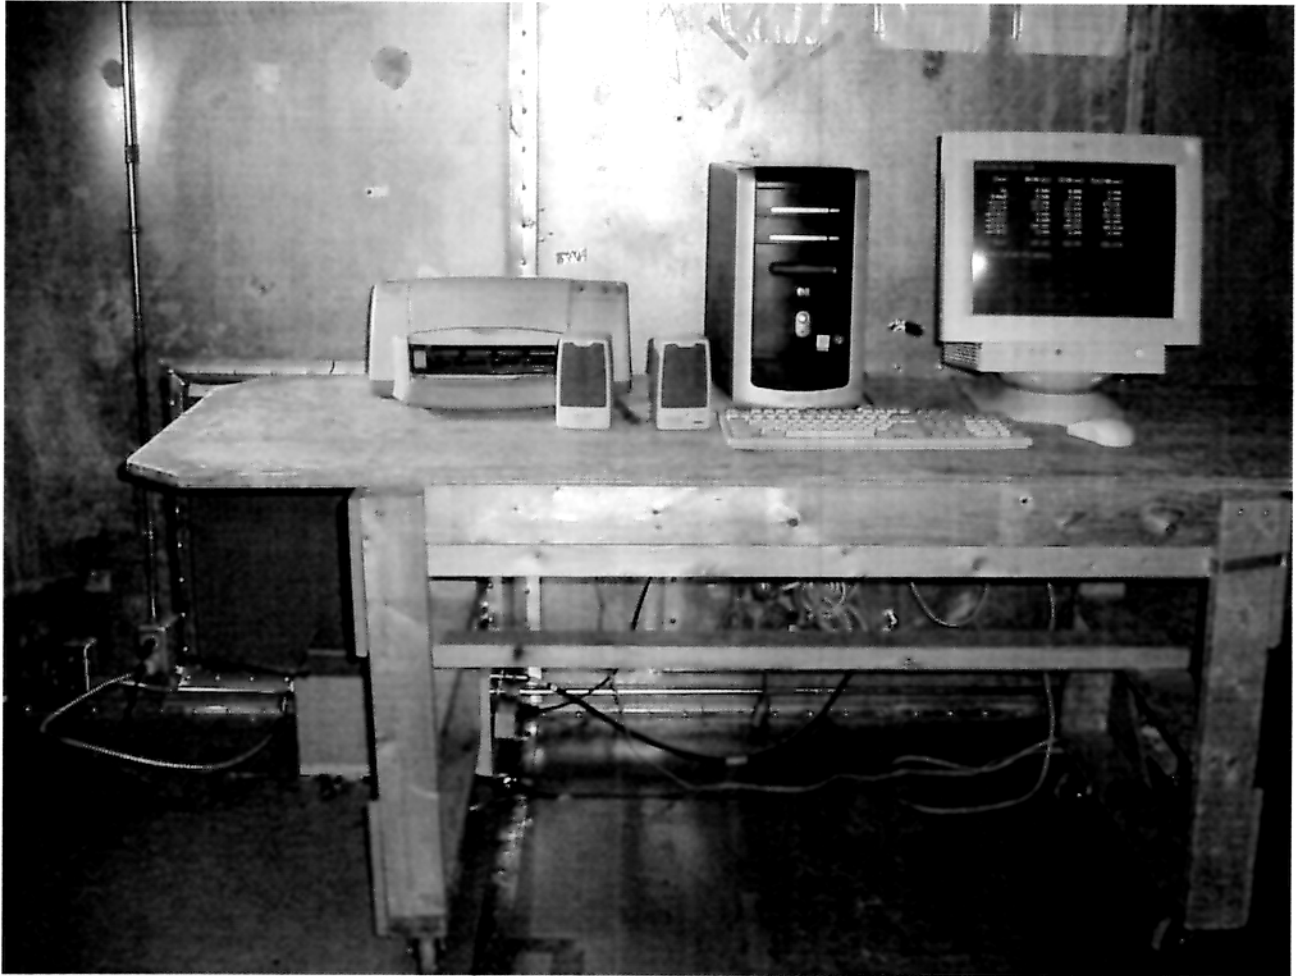

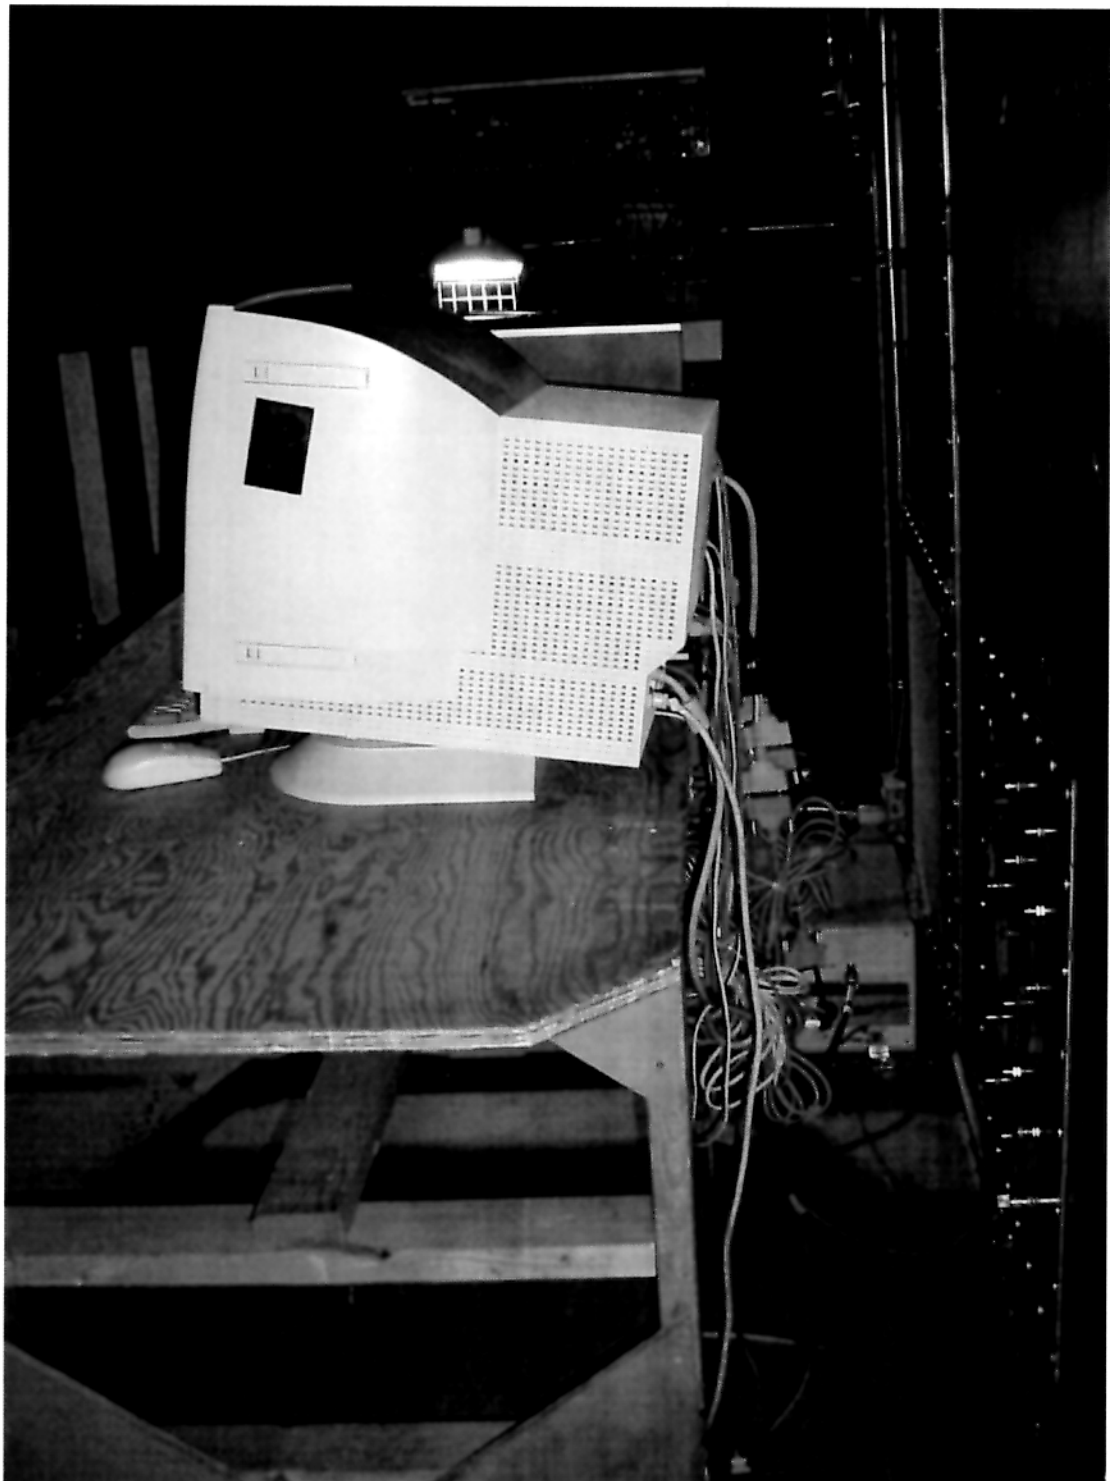

## 5.5. RADIATED EMISSIONS FROM CLASS A UNINTENTIONAL RADIATORS (DIGITAL DEVICES) @ FCC 15.109(B)

### 5.5.1. Limits

The equipment shall meet the limits of the following table:

Test Frequency Range (MHz)	Class A Limits @10 m (dB $\mu$ V/m)	EMI Detector Used	Measuring Bandwidth (kHz)
30 – 88	39.1	Quasi-Peak	RBW = 120 kHz, VBW $\geq$ 120 kHz
88 – 216	43.5	Quasi-Peak	RBW = 120 kHz, VBW $\geq$ 120 kHz
216 – 960	46.4	Quasi-Peak	RBW = 120 kHz, VBW $\geq$ 120 kHz
Above 960	49.5	Average	RBW = 1 MHz, VBW = 1 Hz

### 5.5.2. Method of Measurements

Please refer to the Exhibit 7 of this test report and ANSI C63-4:1992 for radiated emissions test method.

The EUT shall be scanned from 30 MHz to the 5<sup>th</sup> harmonic of the highest oscillator frequency in the digital devices or 1 GHz whichever is higher.

### 5.5.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/EMI Receiver	Advantest	R3271	15050203	100 Hz to 32 GHz with external mixer for frequency above 32 GHz
EMI Receiver System/Spectrum Analyzer	Hewlett Packard	HP 8546A	3520A00248	9KHz-5.6GHz, 50 Ohms
Microwave Amplifier	Hewlett Packard	HP 83017A	311600661	1 GHz to 26.5 GHz
Biconilog Antenna	EMCO	3143	1029	20 MHz to 2 GHz
Horn Antenna	EMCO	3155	9701-5061	1 GHz – 18 GHz

**5.5.4. Test Data**

The emissions were scanned from 30 MHz to 1 GHz at 10 meters distance and all emissions less than 20 dB below the limits were recorded.

FREQUENCY (MHz)	RF LEVEL (dBuV/m)	DETECTOR USED (PEAK/QP)	ANTENNA PLANE (H/V)	LIMIT (dBuV/m)	MARGIN (dB)	PASS/ FAIL
33.44	35.7	PEAK	V	39.1	-3.4	PASS
33.44	33.3	PEAK	H	39.1	-5.8	PASS
39.90	36.4	PEAK	V	39.1	-2.7	PASS
39.90	22.5	PEAK	H	39.1	-16.6	PASS
42.10	32.6	PEAK	V	39.1	-6.5	PASS
42.10	19.9	PEAK	H	39.1	-19.2	PASS
42.79	34.5	PEAK	V	39.1	-4.6	PASS
42.79	20.1	PEAK	H	39.1	-19.0	PASS
46.41	33.5	PEAK	V	39.1	-5.6	PASS
46.41	26.7	PEAK	H	39.1	-12.4	PASS
59.95	35.8	QP	V	39.1	-3.3	PASS
59.95	27.4	PEAK	H	39.1	-11.7	PASS
61.15	38.0	PEAK	V	39.1	-1.1	PASS
61.15	26.0	PEAK	H	39.1	-13.1	PASS
63.00	34.9	PEAK	V	39.1	-4.2	PASS
63.00	25.0	PEAK	H	39.1	-14.1	PASS
64.65	35.6	PEAK	V	39.1	-3.5	PASS
64.65	24.9	PEAK	H	39.1	-14.2	PASS
66.00	35.3	PEAK	V	39.1	-3.8	PASS
66.00	35.8	PEAK	H	39.1	-3.3	PASS
66.39	33.6	QP	V	39.1	-5.5	PASS
66.39	36.1	PEAK	H	39.1	-3.0	PASS
67.71	36.4	PEAK	V	39.1	-2.7	PASS
67.71	32.1	PEAK	H	39.1	-7.0	PASS
71.00	37.0	QP	V	39.1	-2.1	PASS
71.00	30.8	PEAK	H	39.1	-8.3	PASS
73.18	36.4	PEAK	V	39.1	-2.7	PASS
73.18	27.2	PEAK	H	39.1	-12.0	PASS
74.55	36.5	PEAK	V	39.1	-2.6	PASS
74.55	26.9	PEAK	H	39.1	-12.2	PASS
79.80	28.4	QP	V	39.1	-10.7	PASS
79.80	29.0	PEAK	H	39.1	-10.1	PASS
80.90	34.9	QP	V	39.1	-4.2	PASS
80.90	29.1	PEAK	H	39.1	-10.0	PASS
84.15	36.4	PEAK	V	39.1	-2.7	PASS
84.15	29.7	PEAK	H	39.1	-9.5	PASS

Continued....




FREQUENCY (MHz)	RF LEVEL (dBuV/m)	DETECTOR USED (PEAK/QP)	ANTENNA PLANE (H/V)	LIMIT (dBuV/m)	MARGIN (dB)	PASS/ FAIL
85.88	36.0	PEAK	V	39.1	-3.1	PASS
85.88	27.3	PEAK	H	39.1	-11.8	PASS
87.56	33.5	PEAK	V	39.1	-5.6	PASS
87.56	26.5	PEAK	H	39.1	-12.6	PASS
88.38	35.0	PEAK	V	43.5	-8.5	PASS
88.38	26.5	PEAK	H	43.5	-17.0	PASS
89.19	34.8	PEAK	V	43.5	-8.8	PASS
89.19	25.0	PEAK	H	43.5	-18.5	PASS
90.81	34.4	PEAK	V	43.5	-9.1	PASS
90.81	25.0	PEAK	H	43.5	-18.5	PASS
94.13	31.4	PEAK	V	43.5	-12.1	PASS
94.13	23.7	PEAK	H	43.5	-19.9	PASS
96.13	35.5	PEAK	V	43.5	-8.0	PASS
96.13	30.0	PEAK	H	43.5	-13.5	PASS
97.44	33.7	PEAK	V	43.5	-9.8	PASS
97.44	28.5	PEAK	H	43.5	-15.0	PASS
99.00	34.8	PEAK	V	43.5	-8.7	PASS
99.00	26.9	PEAK	H	43.5	-16.6	PASS
100.63	33.2	PEAK	V	43.5	-10.3	PASS
100.63	28.1	PEAK	H	43.5	-15.4	PASS
103.94	33.4	PEAK	V	43.5	-10.1	PASS
103.94	27.4	PEAK	H	43.5	-16.1	PASS
107.50	31.6	PEAK	V	43.5	-11.9	PASS
107.50	30.1	PEAK	H	43.5	-13.4	PASS
148.80	33.0	PEAK	V	43.5	-10.6	PASS
148.80	26.7	PEAK	H	43.5	-16.8	PASS
157.00	32.5	PEAK	V	43.5	-11.0	PASS
157.00	28.9	PEAK	H	43.5	-14.7	PASS
160.30	33.5	PEAK	V	43.5	-10.0	PASS
160.30	26.0	PEAK	H	43.5	-17.5	PASS
170.30	30.7	PEAK	V	43.5	-12.8	PASS
170.30	25.6	PEAK	H	43.5	-17.9	PASS
175.00	31.4	PEAK	V	43.5	-12.1	PASS
175.00	27.1	PEAK	H	43.5	-16.4	PASS
180.00	32.2	PEAK	V	43.5	-11.3	PASS
180.00	27.5	PEAK	H	43.5	-16.0	PASS
183.30	32.8	PEAK	V	43.5	-10.7	PASS
183.30	27.5	PEAK	H	43.5	-16.0	PASS
185.00	34.3	PEAK	V	43.5	-9.2	PASS
185.00	27.1	PEAK	H	43.5	-16.4	PASS

Continued...

FREQUENCY (MHz)	RF LEVEL (dBuV/m)	DETECTOR USED (PEAK/QP)	ANTENNA PLANE (H/V)	LIMIT (dBuV/m)	MARGIN (dB)	PASS/ FAIL
188.00	34.1	PEAK	V	43.5	-9.4	PASS
188.00	26.7	PEAK	H	43.5	-16.8	PASS
190.00	35.3	PEAK	V	43.5	-8.2	PASS
190.00	29.2	PEAK	H	43.5	-14.3	PASS
193.30	33.0	PEAK	V	43.5	-10.5	PASS
193.30	31.1	PEAK	H	43.5	-12.4	PASS
204.70	32.4	PEAK	V	43.5	-11.1	PASS
204.70	33.8	PEAK	H	43.5	-9.7	PASS
213.20	34.9	PEAK	V	43.5	-8.6	PASS
213.20	36.0	PEAK	H	43.5	-7.5	PASS
216.30	35.1	PEAK	V	46.4	-11.3	PASS
216.30	35.7	PEAK	H	46.4	-10.7	PASS
429.50	36.6	PEAK	V	46.4	-9.8	PASS
429.50	31.8	PEAK	H	46.4	-14.7	PASS
595.10	36.9	PEAK	V	46.4	-9.5	PASS
595.10	35.2	PEAK	H	46.4	-11.2	PASS
625.10	36.5	PEAK	V	46.4	-9.9	PASS
625.10	37.0	PEAK	H	46.4	-9.4	PASS
630.20	38.5	PEAK	V	46.4	-7.9	PASS
630.20	38.0	PEAK	H	46.4	-8.4	PASS
672.90	38.7	PEAK	V	46.4	-7.7	PASS
672.90	36.0	PEAK	H	46.4	-10.4	PASS
693.90	39.9	PEAK	V	46.4	-6.5	PASS
693.90	36.2	PEAK	H	46.4	-10.2	PASS
727.10	38.4	PEAK	V	46.4	-8.0	PASS
727.10	36.8	PEAK	H	46.4	-9.6	PASS
759.70	36.3	PEAK	V	46.4	-10.2	PASS
759.70	36.2	PEAK	H	46.4	-10.2	PASS


### 5.5.5. Plots


The following plots graphically represent the test results recorded in the above Test Data Table.

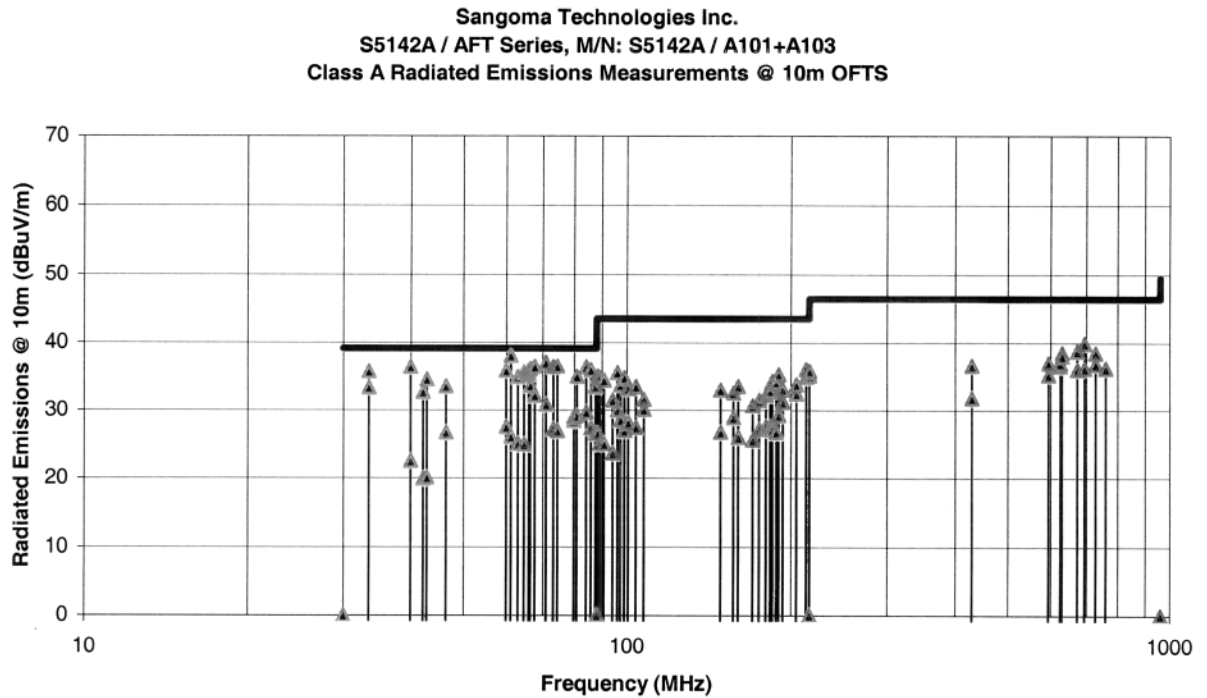

### **5.5.6.      *Photographs of Test Setup***

Refer to the following photographs for setup and arrangement of equipment under tests.

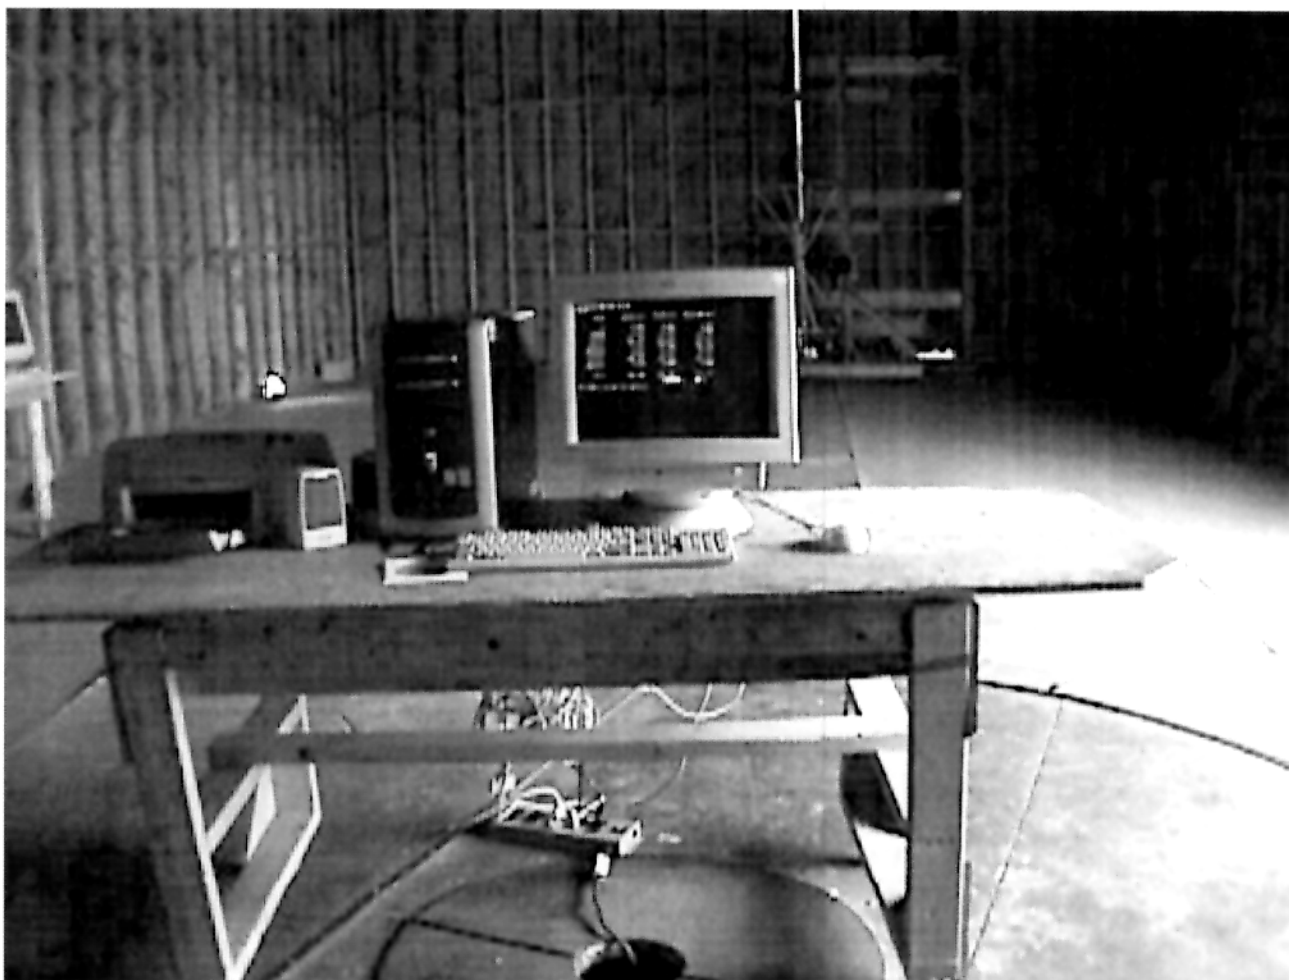

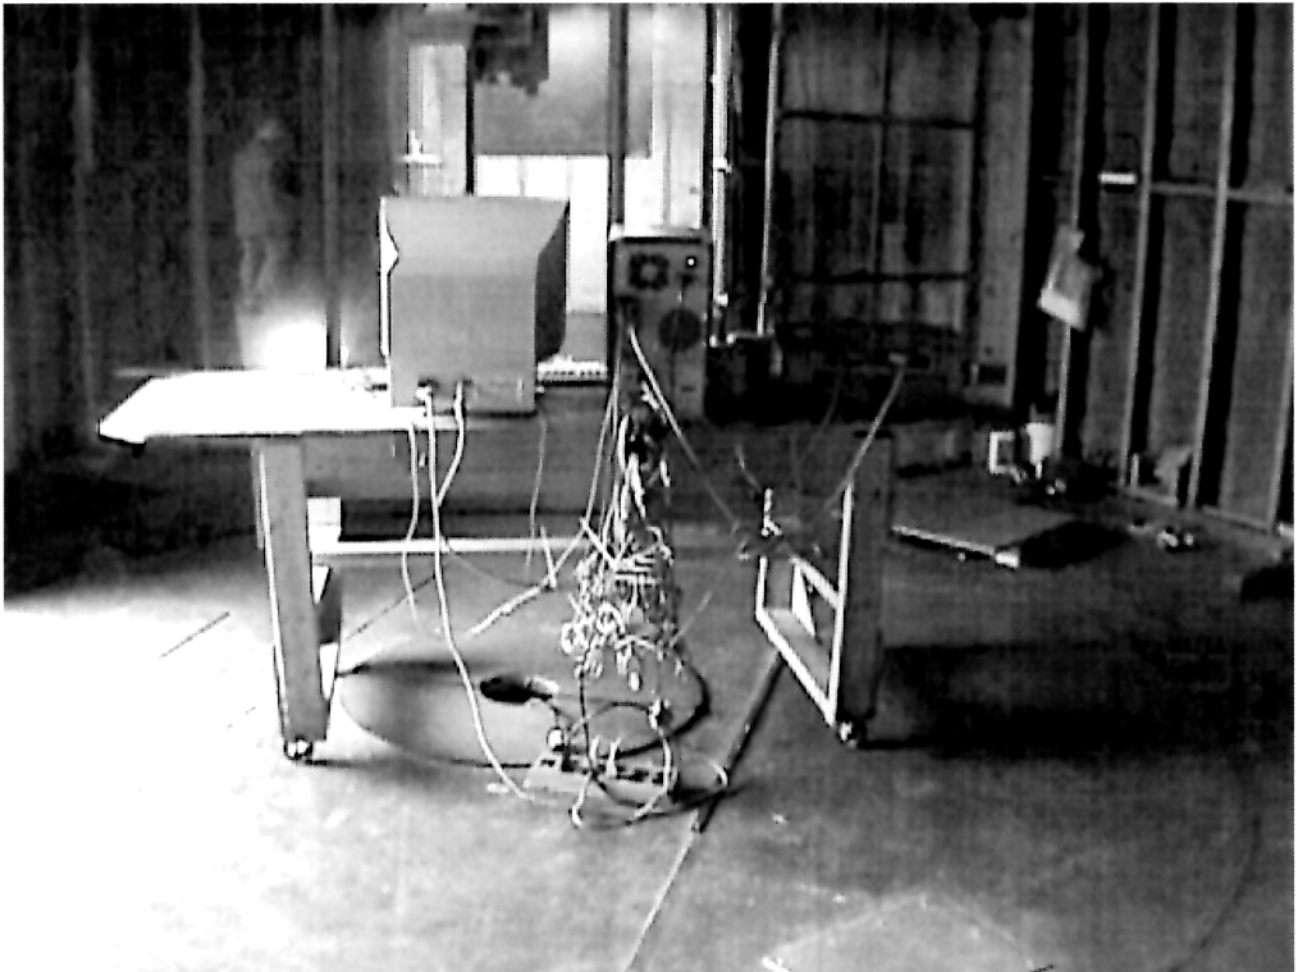

## EXHIBIT 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994)

### 6.1. LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY

CONTRIBUTION (Line Conducted)	PROBABILITY DISTRIBUTION	UNCERTAINTY (dB)	
		9-150 kHz	0.15-30 MHz
EMI Receiver specification	Rectangular	$\pm 1.5$	$\pm 1.5$
LISN coupling specification	Rectangular	$\pm 1.5$	$\pm 1.5$
Cable and Input Transient Limiter calibration	Normal (k=2)	$\pm 0.3$	$\pm 0.5$
Mismatch: Receiver VRC $\Gamma_1 = 0.03$ LISN VRC $\Gamma_R = 0.8$ (9 kHz) 0.2 (30 MHz) Uncertainty limits $20\text{Log}(1+\Gamma_1\Gamma_R)$	U-Shaped	$\pm 0.2$	$\pm 0.3$
System repeatability	Std. deviation	$\pm 0.2$	$\pm 0.05$
Repeatability of EUT	--	--	--
Combined standard uncertainty	Normal	$\pm 1.25$	$\pm 1.30$
Expanded uncertainty U	Normal (k=2)	$\pm 2.50$	$\pm 2.60$

Sample Calculation for Measurement Accuracy in 150 kHz to 30 MHz Band:

$$u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)} = \pm \sqrt{(1.5^2 + 1.5^2)/3 + (0.5/2)^2 + (0.05/2)^2 + 0.35^2} = \pm 1.30 \text{ dB}$$

$$U = 2u_c(y) = \pm 2.6 \text{ dB}$$

## 6.2. RADIATED EMISSION MEASUREMENT UNCERTAINTY

CONTRIBUTION (Radiated Emissions)	PROBABILITY DISTRIBUTION	Uncertainty (dB)	
		3m	10m
Antenna Factor Calibration	Normal (k=2)	+1.0	+1.0
Cable Loss Calibration	Normal (k=2)	+0.3	+0.5
EMI Receiver specification	Rectangular	+1.5	+1.5
Antenna Directivity	Rectangular	+0.5	+0.5
Antenna factor variation with height	Rectangular	+2.0	+0.5
Antenna phase center variation	Rectangular	0.0	+0.2
Antenna factor frequency interpolation	Rectangular	+0.25	+0.25
Measurement distance variation	Rectangular	+0.6	+0.4
Site imperfections	Rectangular	+2.0	+2.0
Mismatch: Receiver VRC $\Gamma_1 = 0.2$ Antenna VRC $\Gamma_R = 0.67(Bi) 0.3 (Lp)$ Uncertainty limits $20\text{Log}(1+\Gamma_1\Gamma_R)$	U-Shaped	+1.1 -1.25	+0.5
System repeatability	Std. Deviation	+0.5	+0.5
Repeatability of EUT		-	-
Combined standard uncertainty	Normal	+2.19 / -2.21	+1.74 / -1.72
Expanded uncertainty U	Normal (k=2)	+4.38 / -4.42	+3.48 / -3.44

Calculation for maximum uncertainty when 10 M biconical antenna including a factor of k=2 is used:

$$U = 2u_c(y) = 2x(+2.19) = +4.38 \text{ dB} \quad \text{And} \quad U = 2u_c(y) = 2x(-2.21) = -4.42 \text{ dB}$$

## EXHIBIT 7. MEASUREMENT METHODS

### 7.1. GENERAL TEST CONDITIONS

#### 7.1.1. Test Conditions


- The measurement shall be made in the operational mode producing the largest emission in the frequency band being investigated consistent with normal applications.
- An attempt shall be made to maximize the detected radiated emissions, for example moving cables of the equipment, rotating the equipment by 360° and moving the measuring receiving antenna up and down within 1 to 4 meters high.
- Where appropriate, a single tone or a bit stream shall be used to modulate the receiver. The manufacturer shall define the modulation with the highest emission in transmit mode.

#### 7.1.2. Method of Measurements - AC Mains Conducted Emissions

- AC Mains conducted emissions measurements were performed in accordance with the standard against appropriate limits for each detector function.
- The test was performed in the shielded room, 16'(L) by 16'(W) by 12'(H).
- The test was performed were made over the frequency range from 150 kHz to 30 MHz to determine the line-to-ground radio noise voltage which was conducted from the EUT power-input terminals that were directly connected to a public power network.
- The EUT normally received power from another device that connects to the public utility ac power lines, measurements would be made on that device with the EUT in operation to ensure that the device continues to comply with the appropriate limits while providing the EUT with power.
- If the EUT operates only from internal or dedicated batteries, with no provisions for connection to the public utility ac power lines, AC Mains conducted measurements are not required.
- Table-top devices were placed on a platform of nominal size 1 m by 1.5m raised 80 cm above the conducting ground plane.
- The EUT current-carrying power lead, except the ground (safety) lead, was individually connected through a LISN to the power source. All unused 50-Ohm connectors of the LISN was terminated in 50-ohm when not connected to the measuring instruments.
- The line cord of the EUT connected to one LISN which was connected to the measuring instrument. Those power cords for the units of devices not under measurement were connected to a separate multiple ac outlet. Drawings and photographs of typically conducted emission test setups were shown in the Test Report. Each current-carrying conductor of the EUT shall be individually tested.
- The EUT was normally operated with a ground (safety) connection, the EUT was connected to the ground at the LISN through a conductor provided in the lead from the ac power mains to the LISN.
- The excess length of the power cord was folded back and forth in an 8-shape on a wooden strip with a vertical prong located on the top of the LISN case.
- The EUT was set-up in its typical configuration and operated in its various modes as described in this test report.
- A preliminary scan was made by using spectrum analyzer system with the detector function set to PEAK mode (9 KHz RBW, VBW > RBW), frequency band 450 kHz - 30 MHz.
- The maximum conducted emission for a given mode of operation was found by using the following step-by-step procedure:
  - 1) Monitor the frequency range of interest at a fixed EUT azimuth.
  - 2) Manipulate the system cables and peripheral devices to produce highest amplitude signal relative to the limit. Note the amplitude and frequency of the suspect signal.
  - 3) The effects of various modes of operation is examined. This is done by varying equipment operation modes as step 2 is being performed.



- 4) After completing step 1 through 3, record EUT and peripheral device configuration, mode of operation, cable configuration, signal levels and frequencies for final test.
- Each highest signal level at the maximized test configuration was zoomed in a small frequency span on the spectrum analyzer's display (the manipulation of cables and peripheral devices and EUT operation modes might have to be repeated to obtain the highest signal level with the spectrum analyzer set to PEAK detector mode 10 KHz RBW and VBW > RBW). The spectrum analyzer was then set to CISPR QUASI-PEAK detector mode (9 KHz RBW, 1 MHz VBW) and AVERAGE detector mode (9 kHz RBW, 1 Hz VBW). The final highest RF signal levels and frequencies were record.

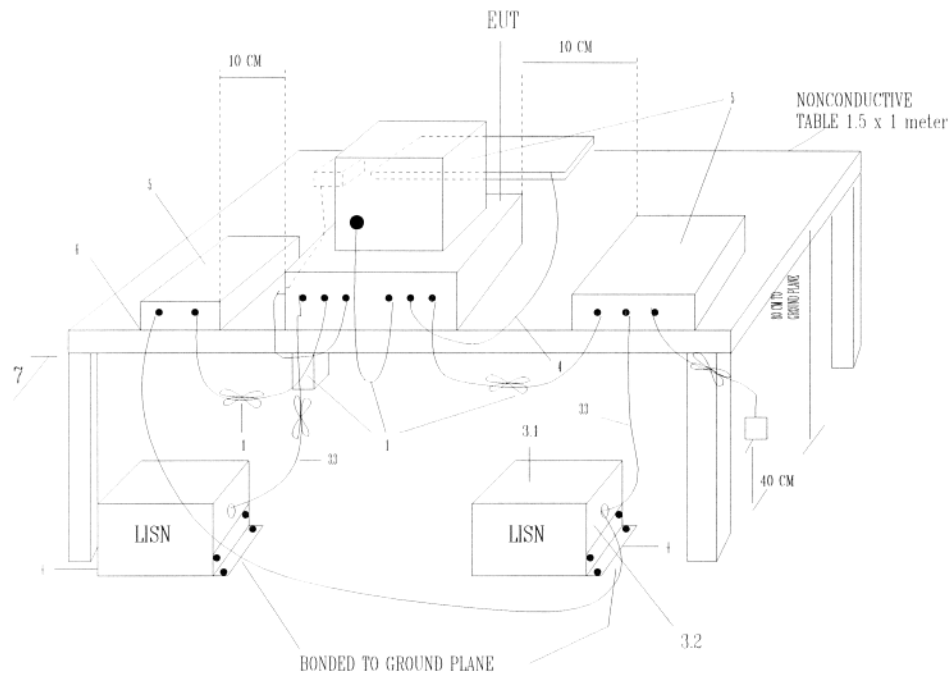


+LISNs may have to be moved to the side to meet 3.3 below

LEGEND:

1. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back at forth forming a bundle 30 to 40 cm long, hanging approximately in the middle between ground plane and table.
2. I/O cables that are connected to a peripheral shall be bundled in center. The end of the cable may be terminated if required using correct terminating impedance. The total length shall not exceed 1m.
3. EUT connected to one LISN. Unused LISN connectors shall be terminated in 50 Ohm. LISN can be placed on top of, or immediately beneath, ground plane.
  - 3.1 All other equipment powered from second LISN.
  - 3.2 Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - 3.3 LISN at least 80 cm from nearest part of EUT chassis.
4. Cables of hand-operated devices, such as keyboards, mouses, etc., have to be placed as close as possible to the host.
5. Non-EUT components being tested.
6. Rear of EUT, including peripherals, shall be all aligned and flush with rear of tabletop.
7. Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the floor ground plane (see 5.2)

Tabletop Equipment Conducted Emissions

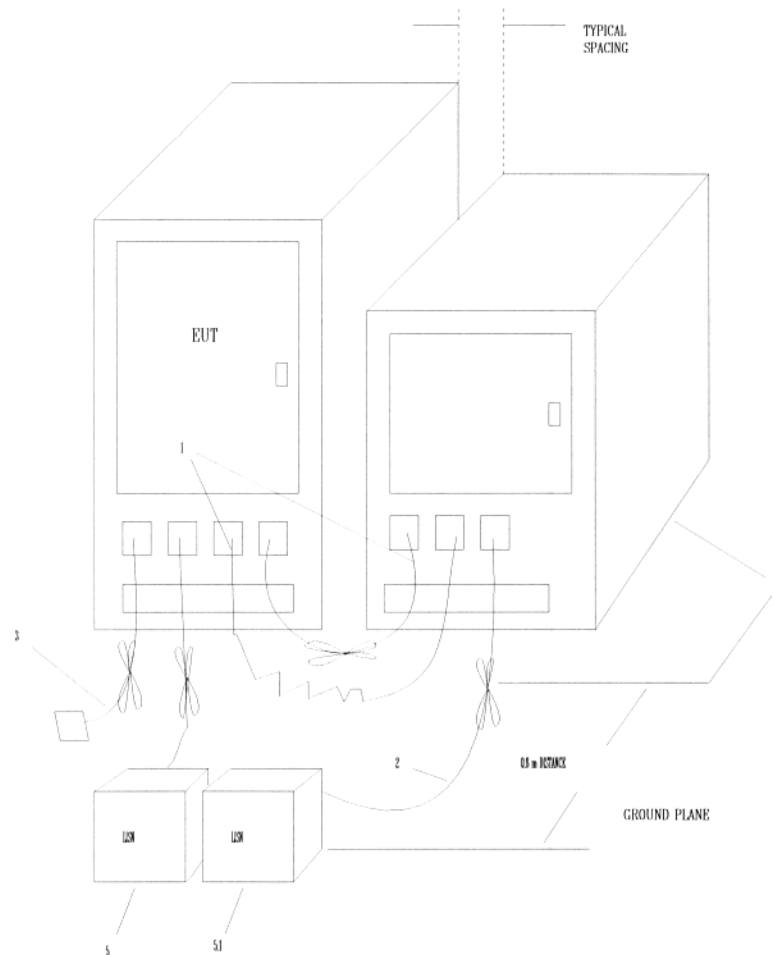

**LEGEND:**

1. Excess I/O cables shall be bundled in center. If bundling is not possible, the cables shall be arranged in serpentine fashion. Bundling shall not exceed 40 cm in length.
2. Excess power cords shall be bundled in the center or shortened to appropriated length.
3. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated if required using correct terminating impedance. If bundling is not possible, the cable shall be arranged in serpentine fashion.
4. EUT and all cables shall be insulated from ground plane by 3 to 12 mm of insulating material.
5. EUT connected to one LISN. LISN can be placed on top of, or immediately beneath, ground plane.
- 5.1 All other equipment powered from second LISN.

Floor-Standing Equipment Conducted Emissions

### 7.1.3. **Method of Measurements - Electric Field Radiated Disturbance**

- The radiated emission measurements were performed at the UltraTech's 10 Meter Open Field Test Site (OFTS) situated in the Town of Oakville, Province of Ontario. The Attenuation Characteristics of OFTS have been filed to FCC, Industry Canada, ACA/Austel, NVLap and ITI.
- Radiated emissions measurements were made using the following test instruments:
  1. Calibrated EMCO BiconiLog antenna in the frequency range from 30 MHz to 2000 MHz.
  2. Calibrated Emco Horn antennas in the frequency range above 1000 MHz (1GHz - 40 GHz).
  3. Calibrated Advantest spectrum analyzer and pre-selector. In general, the spectrum analyzer would be used as follows:
    - The rf electric field levels were measured with the spectrum analyzer set to PEAK detector (120 KHz VBW and VBW  $\geq$  RBW).
    - If any rf emission was observed to be a broadband noise, the spectrum analyzer's CISPR QUASI-PEAK detector (120 KHz RBW and VBW  $\geq$  RBW) was then set to measure the signal level.
    - If the signal being measured was narrowband and the ambient field was broadband, the bandwidth of the spectrum analyzer was reduced.
- The EUT was set-up in its typical configuration and operated in its various modes as described in this test report.
- The frequencies of emissions was first detected. Then the amplitude of the emissions was measured at the specified measurement distance using required antenna height, polarization, and detector characteristics.
- During this process, cables and peripheral devices were manipulated within the range of likely configuration.
- For each mode of operation required to be tested, the frequency spectrum was monitored. Variations in antenna heights (from 1 meter to 4 meters above the ground plane), antenna polarization (horizontal plane and vertical plane), cable placement and peripheral placement were explored to produce the highest amplitude signal relative to the limit.

The maximum radiated emission for a given mode of operation was found by using the following step-by-step procedure:

- Step1: Monitor the frequency range of interest at a fixed antenna height and EUT azimuth.
- Step2: Manipulate the system cables to produce highest amplitude signal relative to the limit. Note the amplitude and frequency of the suspect signal.
- Step3: Rotate the EUT 360 degrees to maximize the suspected highest amplitude signal. If the signal or another at a different frequency is observed to exceed the previously noted highest amplitude signal by 1 dB or more, go back to the azimuth and repeat Step 2. Otherwise, orient the EUT azimuth to repeat the highest amplitude observation and proceed.
- Step4: Move the antenna over its full allowed range of travel (1 to 4 meters) to maximize the suspected highest amplitude signal. If the signal or another at a different frequency is observed to exceed the previously noted highest amplitude signal by 1 dB or more, return to Step 2 with the highest amplitude observation and proceed.
- Step5: Change the polarization of the antenna and repeat Step 2 through 4. Compare the resulting suspected highest amplitude signal with that found for the other polarization. Select and note the higher of the two signals. This signal is termed the highest observed signal with respect to the limit for this EUT operational mode.

Step6: The effects of various modes of operation is examined. This is done by varying the equipment modes as steps 2 through 5 are being performed.

Step7: After completing steps 1 through 6, record the final highest emission level, frequency, antenna polarization and detector mode of the measuring instrument.

**Calculation of Field Strength:**

The field strength is calculated by adding the calibrated antenna factor and cable factor, and subtracting the Amplifier gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where	FS	=	Field Strength
	RA	=	Receiver/Analyzer Reading
	AF	=	Antenna Factor
	CF	=	Cable Attenuation Factor
	AG	=	Amplifier Gain


Example: If a receiver reading of 60.0 dBuV is obtained, the antenna factor of 7.0 dB/m and cable factor of 1.0 dB are added, and the amplifier gain of 30 dB is subtracted. The actual field strength will be:.

Field Level =  $60 + 7.0 + 1.0 - 30 = 38.0$  dBuV/m.

Field Level =  $10^{(38/20)} = 79.43$  uV/m.



- ## Tabletop Equipment Radiated Emissions

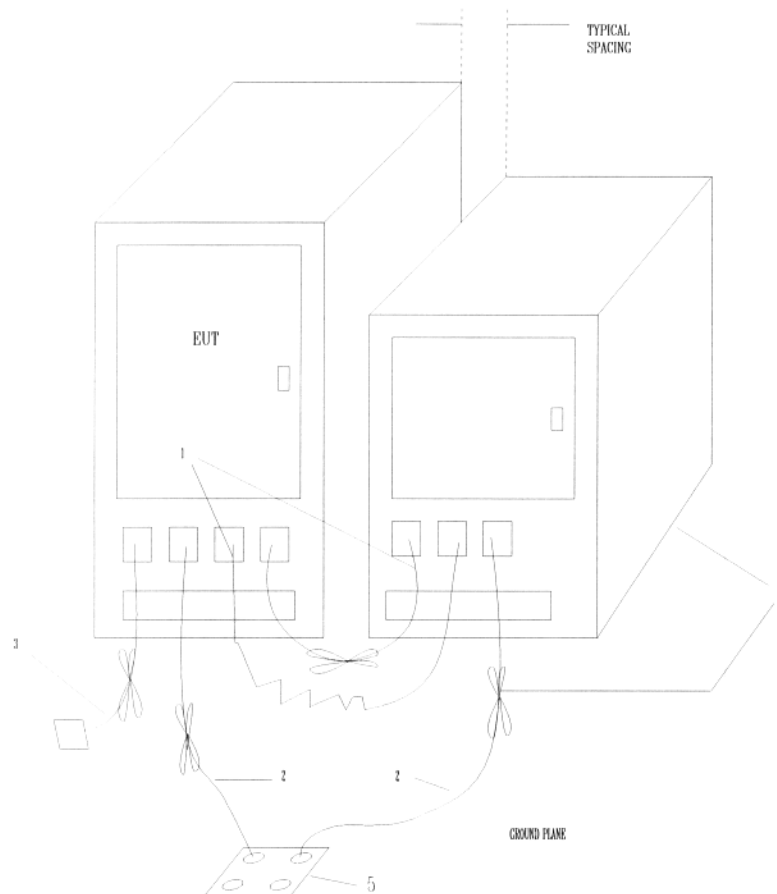

**LEGEND:**

- 1 Excess I/O cables shall be bundled in center. If bundling is not possible, the cables shall be arranged in serpentine fashion.
- 2 Excess power cords shall be bundled in the center or shortened to appropriated length.
- 3 I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated if required using correct terminating impedance. If bundling is not possible, the cable shall be arranged in serpentine fashion.
- 4 EUT and all cables shall be insulated from ground plane by 3 to 12 mm of insulating material.
- 5 If LISNs are kept in the test setup for radiated emissions, it is preferred that they be installed under the ground plane with the receptacle flush with the ground plane.

**Floor-Standing Equipment Radiated Emissions**

## EXHIBIT 8. LABELLING & VERIFICATION REQUIREMENTS

### 8.1. SECTION 15.19 - LABELING REQUIREMENTS

For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

*This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.*

- (1) The label shall NOT be a stick-on , paper label. The label on these products shall be permanently affixed to the product and shall be readily visible to the purchaser at the time of purchase, as described in FCC 2.925(d). "Permanently" affixed means that the label is etched, engraved, stamped, silk-screened, indelibly printed, or otherwise permanently marked on a permanently attached part of the equipment or on a nameplate of metal plastic, or other material fastened to the equipment by welding, riveting, or a permanent adhesive. The label must be designed to last the expected life-time of the equipment in the environment in which the equipment may be operated and must not be readily detachable.
- (2) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified in this Section is required to be affixed only to the main control unit.
- (3) When the device is so small or for such use that it is not practicable to place the statement specified in this Section on it, the information required by these paragraphs shall be placed in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

### 8.2. SECTIONS 15.21 & 15.105 - INFORMATION TO USER

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

***NOTE:*** *This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provided reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.*

**Warning:** Changes or modifications not expressly approved by <manufacturer> could void the user's authority to operate the equipment.



### 8.3. SECTION 2.909 - RESPONSIBLE PARTY

The following parties are responsible for the compliance of radio frequency equipment with the applicable standards:

- (c) In the case of the equipment subject to authorization under the Declaration of Conformity procedure:
  - (1) The manufacturer or, if the equipment is assembled from individual component parts and the resulting system is subject to authorization under Declaration of Conformity, the assembler.
  - (2) If the equipment, by itself, is subject to Declaration of Conformity and the equipment is imported, the importer.

### 8.4. SECTION 2.945 - SAMPLING TEST OF EQUIPMENT COMPLIANCE

The Commission will, from time to time, request the responsible party to submit equipment subject to this chapter to determine the extent to which subsequent production of such equipment continues to comply with the data filed by the applicant (or on file with the responsible party for equipment subject to notification or a Declaration of Conformity). Shipping costs to the Commission's laboratory and return shall be borne by the responsible party.

### 8.5. SECTION 2.946 - PENALTY FOR FAILURE TO PROVIDE TEST SAMPLES AND DATA.

- (a) Any responsible party, as defined in Section 2.909 of this chapter, or any party who markets equipment subject to the provisions of this chapter, shall provide test sample(s) or data upon request by the Commission. Failure to comply with such a request within the time frames shown below may be cause for forfeiture, pursuant to Section 1.80 of Part 1 of this chapter, or other administrative sanctions such as suspending action on any applications for equipment authorization submitted by such party while the matter is being resolved.
  - (1) When the equipment is subject to authorization under Declaration of Conformity, data shall be provided within 14 days of delivery of the request and test sample(s) shall be provided within 60 days of delivery of the request.
  - (2) For all other devices, test sample(s) or data shall be provided within 60 days of the request.
- In the case of the equipment involving harmful interference or safety of life or property, the Commission may specify that test samples subject to the provisions of this section be submitted within less than 60 days, but not less than 14 days. Failure to comply within the specified time period will be subject to the sanctions specified in paragraph (a) of this section.

### 8.6. LIMITATION ON VERIFICATION: FCC PART 2, SUBPART J, SECTION 2.952

- (a) Verification signifies that the manufacturer or importer has determined that the equipment has been shown to be capable of compliance with the applicable technical standards if no unauthorized change is made in the equipment and if the equipment is properly maintained and operated. Compliance with these standards shall not be construed to be a finding by the manufacturer or importer with respect to matters not encompassed by the Commission's rules.
- (b) Verification of the equipment by the manufacturer or importer is effective until a termination date is otherwise established by the Commission.
- (c) No person shall, in any advertising matter, brochure, etc., use or make reference to a verification in a deceptive or misleading manner or convey the impression that such verification reflects more than a determination by the

manufacturer or importer that the device or product has been shown to be capable of compliance with the applicable technical standards of the Commission's Rules.

#### **8.7. RESPONSIBILITY OF MANUFACTURER OR IMPORTER: FCC PART 2, SUBPART J, SECTION 2.953**

- (a) In verifying compliance, the manufacturer or importer (in the case of imported equipment) warrants that each unit of the equipment marketed under the verification procedure will conform to the unit tested and found acceptable by the manufacturer or importer and that data on file with the manufacturer or importer continues to be representative of the equipment being produced under such verification within the variation that can be expected due to quantity production and testing on a statistical basis.
- (b) The importer of equipment subject to verification may upon receiving a written statement from the manufacturer that the equipment complies with the appropriate technical standards rely on the manufacturer or independent testing agency to verify compliance. The test records required by Section 2.955 however should be in English language and made available to the Commission upon a reasonable request.
- (c) In the case of transfer of control of equipment, as in the case of sale or merger of the grantee, the new manufacturer or importer shall bear the responsibility of continued compliance of the equipment.
- (d) Equipment verified by the manufacturer or importer shall be re-verified if the modification or change adversely affects the emanation characteristics of the modified equipment. The manufacturer or importer continues to bear the responsibility for continued compliance of subsequently produced equipment.

#### **8.8. IDENTIFICATION: FCC PART 2, SUBPART J, SECTION 2.954**

The identification of equipment subject to verification shall be consistent with current manufacturer or marketing practices: *Provided*, The manufacturer or importer maintains adequate identification records for each unit verified to facilitate positive identification of each equipment marketed.

#### **8.9. RETENTION OF RECORDS: FCC PART 2, SUBPART J, SECTION 2.955**

- (a) For each equipment subject to verification, the manufacturer (or importer) shall maintain the records listed below:
  - (1) A record of the original design drawings and specifications and all changes that have been made that may affect compliance with the requirements of Section 2.953.
  - (2) A record of the procedures used for production inspection and testing (if tests were performed) to insure the conformance required by Section 2.953. (Statistical production line emission testing is not required).
- (b) The records listed in paragraphs (a) of this section shall be retained for two years after the manufacture of said equipment item has been permanently discontinued, or until the conclusion of an investigation or a proceeding if the manufacturer or importer is officially notified that an investigation or any other administrative proceeding involving his equipment has been instituted.

## **8.10. FCC INSPECTION & SUBMISSION OF EQUIPMENT FOR TESTING: FCC PART 2, SUBPART J, SEC. 2.956**

- (a) Each manufacturer or importer of equipment subject to verification shall upon receipt of reasonable request submit to the Commission the records required by Section 2.955.
- (b) The Commission may require the manufacturer or importer of equipment subject to verification to submit one or more of sample units for measurements at the Commission's Laboratory.
- (c) In the event the manufacturer believes that shipment of the sample to the Commission's Laboratory is impractical because of the size or weight of the equipment, or the power requirement or for any other reason, the applicant may submit a written explanation why such shipment is impractical and should not be required.

## **8.11. SAMPLING TESTS OF EQUIPMENT COMPLIANCE: FCC PART 2, SUBPART J, SECTION 2.957**

The Commission will from time to time, request the manufacturer or importer to submit to the FCC Laboratory in Columbia, Maryland, various equipment(s) for which verification has been made, to determine the extent to which subsequently produced units continue to comply with the applicable standards.

